N510 IP PRO Release notes 42.238

Release date:

• May-2016

Improvements & Bugfixes

- Handset: Software Update over the air for handsets S650H PRO (min BL60), SL750H PRO (min BL61), R650H PRO
- Handset: Full support of new R650H PRO handset
- Distinctive Ring: Distinguish internal/external PBX numbers by ringtone on handset via alert info. (Group and Door are not supported)
- · CLIP/COLP update after call transfer
- Web Configurator: Turkish, Czech language added
- · Web Configurator: Change default selection "Call transfer by on-hook" to yes
- Directories:
 - O Now Use LDAP address book also during active call (for transfer purposes).
 - Refine search when using private phone-book fixed.
 - Character set problems fixed with Gigaset T440/T640 PBX's
- TR069: Various corrections, enhancements
- · Secure provisioning error fixed
- Music on hold is now audible also after making 3rd Call Swap.
- TLS
- 2 3 new certificates added, also new root- and intermediate certificates from https://letsencrypt.org/certificates/
- Switch to select between TLS v1.0 and TLS v1.1
- O Switch which to select which cipher suite is to be used:
 - RSA_WITH_3DES_EDE_CBC_SHA
 - RSA_WITH_RC4_128_MD5
 - RSA_WITH_RC4_128_SHA
- · Russia: various bugfixes and improvements


Known Issues:

•

How to update:

Via the webpage:

- 1. Download the software and store this on your own accessible http server.
- 2. In the web-interface of the N510: Go to: Settings » Management » Firmware update
- 3. Enter the URL for the new firmware in the User defined firmware file: field
- 4. Click on the button: Update firmware

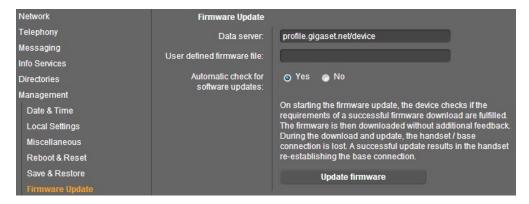

Automatic (Online)

Change the Data server to: profile.gigaset.net/device

Then if you press the *Update firmware* button the device should automatic find the Firmware:



Download