

# Maxwell 10S Door Interphone / Intercom

## Introduction

You can operate multiple door interphones using your Maxwell 10S. If you receive a call from the door interphone, the display shows a picture or video from the connected video camera.


For configuration details see [here](#)

## Tested door interphones

Door intercom	Known Camera (URL)
Felicom	http://<IP-address CP-CAM>/jpg/image.jpg
StentofonBaudisch	http://<IP-address CP-CAM>/jpg/image.jpg
TCS	http://argos_ip/video.jpg
2N	http://<IP-address EntryCom IP>/enu/camera1 280x960.jpg (or 160x120, 320x240, 640x480, 176x144, 322x272, 352x288)
Protalk	http://<IP-address Protalk>/video.jpg
Koch	http://<ip-address AVS110>:12000/video.jpg (Reload rate 50)
Nista Devices	http://<IP address nista>:8080/file.jpg (software release 2abw03 or higher is required)
Robotix	http://<username>:<password>@<IP address Robotix>/record/current.jpg  (e.g. http://admin:12345@192.168.0.101/record/current.jpg)

## Operating door interphones.


When receiving an incoming call from the door intercom, you will see the picture from the door intercom refreshed every ... msec (Reload rate)

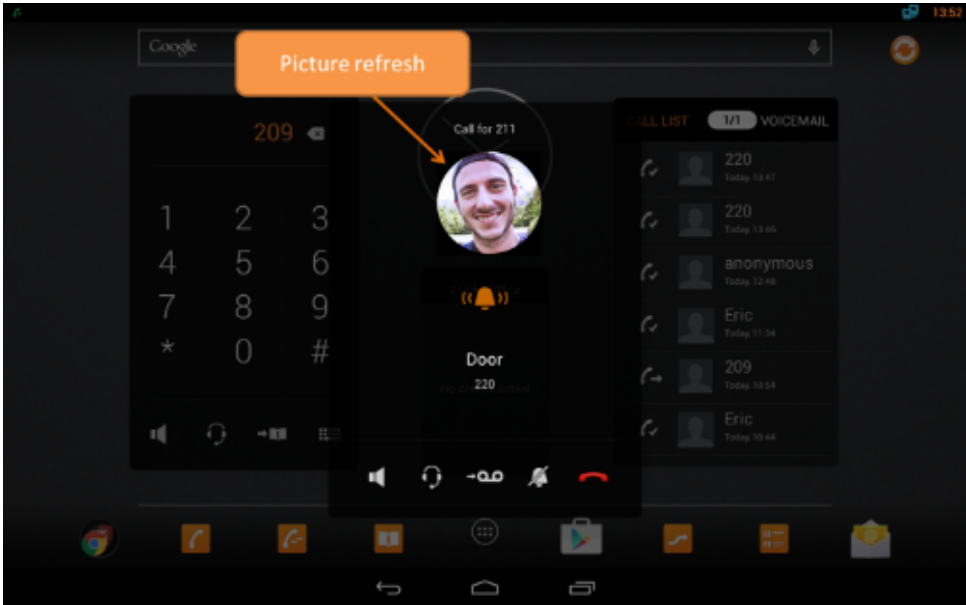

When the call is answered, you will see the Picture from the door intercom in the screen again refreshed every .. msec.



When the door intercom supports Video/Jpeg, you can click on "**VIDEO CALL**" where the device then will setup a video/Jpeg stream between the door intercom and the Maxwell 10.

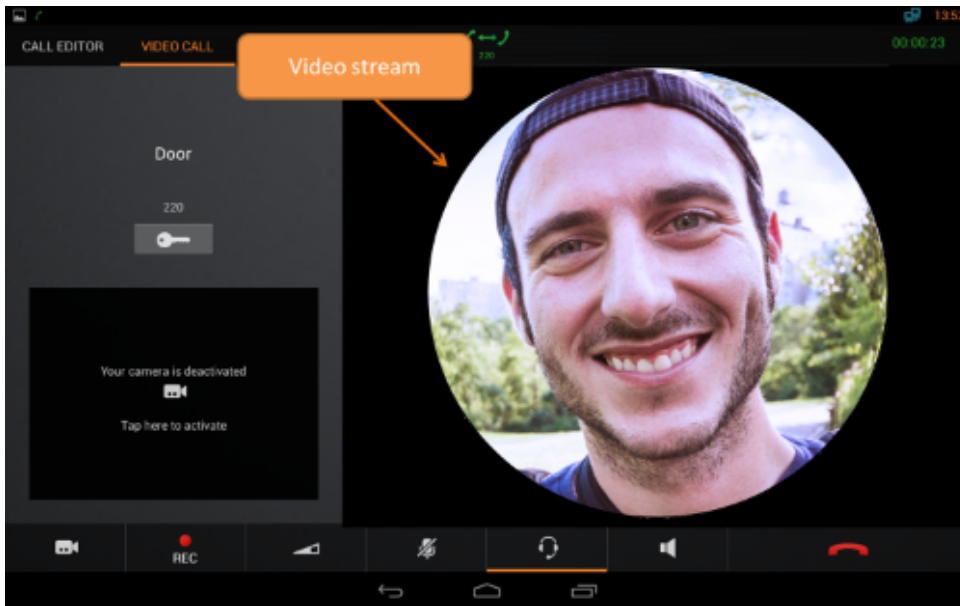

- Introduction
- Tested door interphones
- Operating door interphones.