


FAQ - Auto provisioning: Check-sync with reboot

Valid for: N610 N670 N870 N870E Embedded Integrator Virtual Integrator

Valid for N610 / N670 / N870 / N870E.

The check-sync mechanism allows the initiation of a profile (configuration file) download from remote.

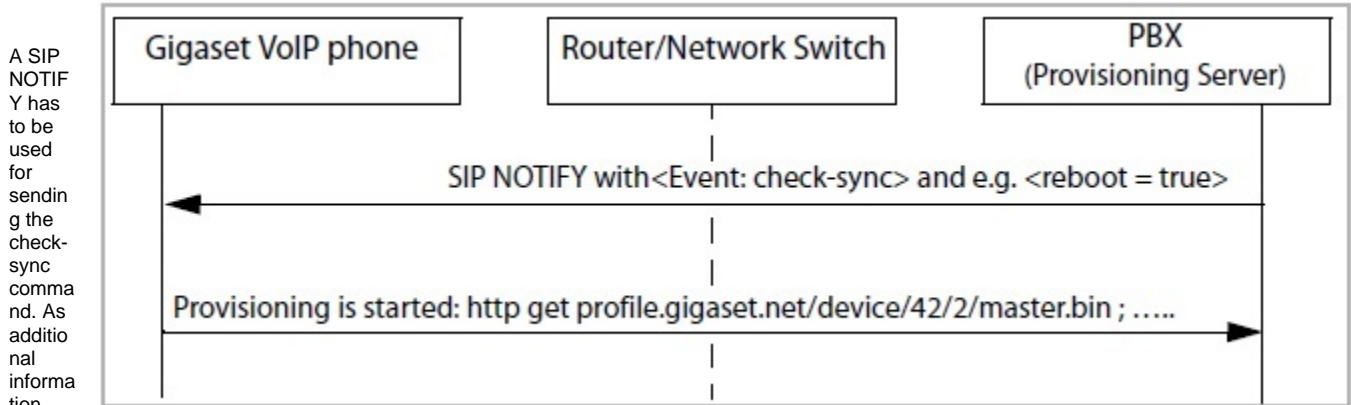

The following pictures show the principle of this.

The following pictures show the principle of this.

A reboot is not needed to activate provisioning parameter changes !!!

Notify message without a reboot:

Notify message without a reboot:

```
NOTIFY sip:1011@192.168.1.106:5060 SIP/2.0
Via: SIP/2.0/UDP 127.0.0.1:5060;branch=z9hG4bK64a54719;rport
From: "Gigaset" <sip:Gigaset@127.0.0.1>;tag=as1fe8c38c
To: <sip:1011@192.168.1.106:5060>
Contact: <sip:Gigaset@127.0.0.1>
Call-ID: 2d9bacf75c2022d744a929ed6d7f3913@127.0.0.1
CSeq: 102 NOTIFY
User-Agent: Gigaset PRO
Max-Forwards: 70
Event: check-sync;reboot=false
Content-Length: 0
```

On customer request, we have added the option to reboot the device from remote via the check-sync with reboot=true command.

- Software 2.52 or higher is needed.
- Has to be enabled via auto-provisioning.
- Due to security reasons, must be send to a valid SIP account of the handset or [provisioning SIP account](#) (Check-sync anonymous like some platforms use, will not trigger an reboot)

```
<?xml version="1.0" encoding="UTF-8"?>
<provisioning version="1.1" productID="e2">
  <nvm>

    <param name="SystemSettings.global.CheckSyncRebootEnabled" value="1" />

  </nvm>
</provisioning>
```

Notify message with a reboot

Notify message with a reboot

NOTIFY sip:1011@172.29.1.51:5060 SIP/2.0
Via: SIP/2.0/UDP 127.0.0.1:5060;branch=z9hG4bK69448a0c;rport
From: "Gigaset" <sip:Gigaset@127.0.0.1>;tag=as39b0fcab
To: <sip:1011@172.29.1.51:5060>
Contact: <sip:Gigaset@127.0.0.1>
Call-ID: 5f7fe6183735ef2b607bd7da0aaf12d0@127.0.0.1
CSeq: 102 NOTIFY
User-Agent: Gigaset PRO
Max-Forwards: 70
Event: check-sync;reboot=true
Content-Length: 0