
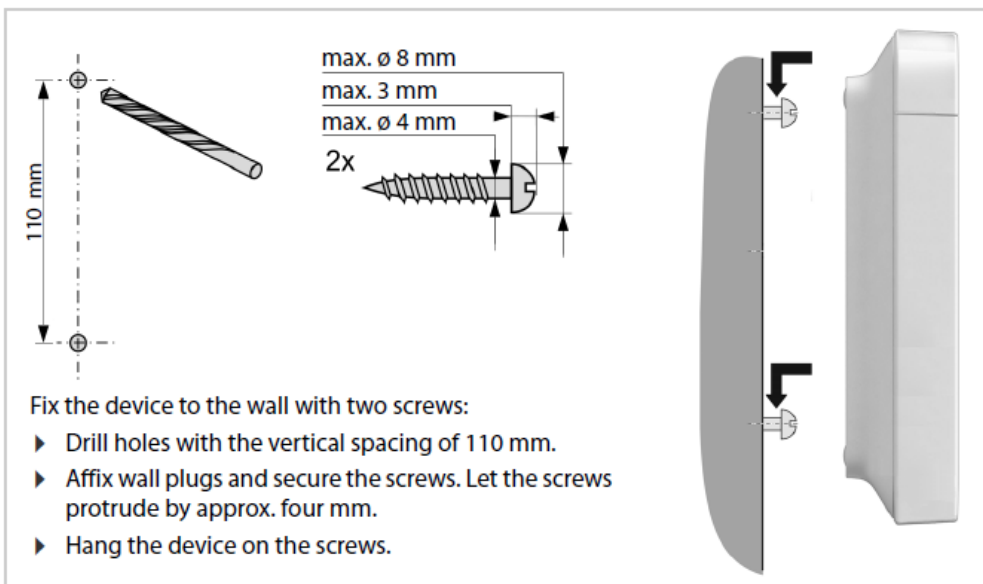


FAQ - Wall mounting

Valid for: N610 N670 N870 N870E Embedded Integrator ~~Virtual Integrator~~

Wall mounting

The device is intended for wall mounting. After connecting the LAN cable and setting the device role you can place it to the destined location.

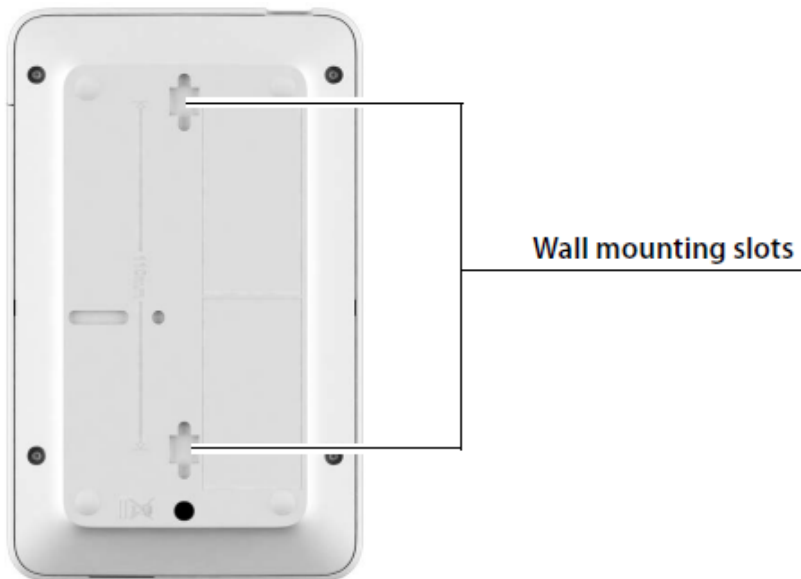

- The devices are designed for use in dry rooms with a temperature range of +5°C to +45°C.
- Never expose the devices to heat sources, direct sunlight or other electrical appliances.
- Protect your device from moisture, dust, corrosive liquids and fumes.