

## FAQ - How to migrate an Multicell to an Virtual Integrator.

Valid for:	<del>N640</del>	N670	N870	N870E	Embedded Integrator	Virtual Integrator
------------	-----------------	------	------	-------	---------------------	--------------------

### Migration to Virtual Integrator

How to Migrate an existing multicell to an Virtual Integrator.

#### Important

You can add every N870 multicell installation to an virtual integrator but if you did not prepare the system during installation, that the DECT PARI is the same. For these systems where the DECT PARI was different the DECT handsets needs to be registered manually again.


The system will use the DECT PARI of the Virtual Integrator and if the DECT PARI changes, the DECT handsets needs to be Registered again.

See here how to prepare an N870 Multisite system during installation to be added later to an Virtual Integrator. [FAQ - How to prepare one DECT manager installations to be added later to Virtual integrator](#)

## Export the base station and handset configuration

Export the base station configuration.

In the web-interface go to: **SETTINGS - Base stations - Administration.**

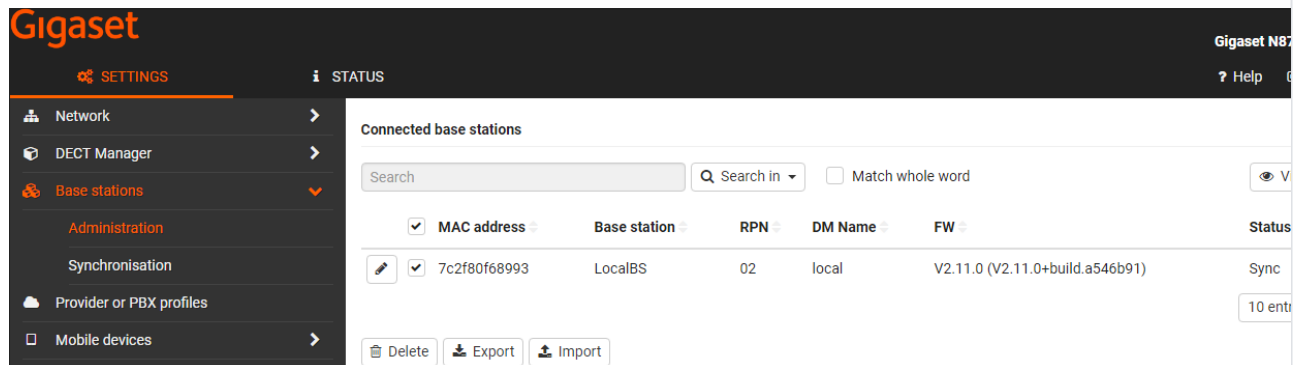

The screenshot shows the Gigaset N87 web interface. The left sidebar has a 'SETTINGS' menu with 'Base stations' expanded, showing 'Administration' selected. The main area is titled 'Connected base stations' and contains a table with the following data:


MAC address	Base station	RPN	DM Name	FW	Status
7c2f80f68993	LocalBS	02	local	V2.11.0 (V2.11.0+build.a546b91)	Sync

Below the table are buttons for 'Delete', 'Export', and 'Import'.

Select all **DECT base stations** and click on **Export**. Save the file to your PC.

Export the DECT handset configuration.

In the web-interface go to: **SETTINGS - Mobile devices - Administration.**

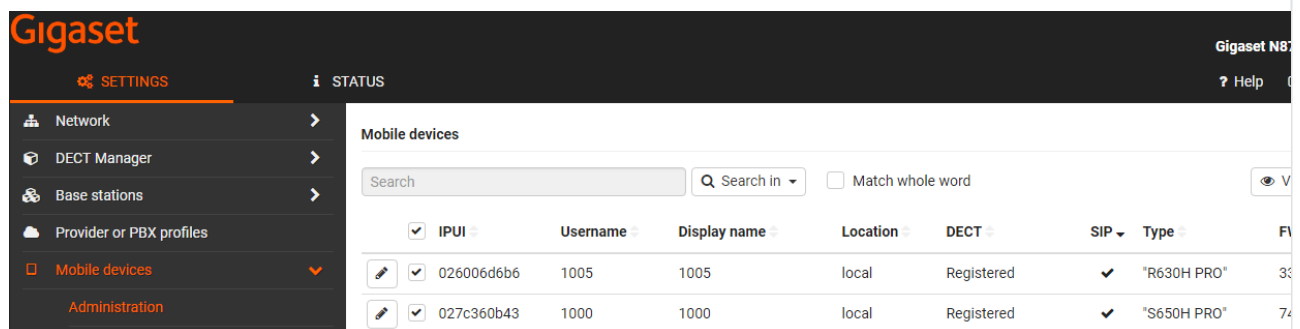


The screenshot shows the Gigaset N87 web interface. The left sidebar has a 'SETTINGS' menu with 'Mobile devices' expanded, showing 'Administration' selected. The main area is titled 'Mobile devices' and contains a table with the following data:

IPUI	Username	Display name	Location	DECT	SIP	Type	FV
026006d6b6	1005	1005	local	Registered	✓	"R630H PRO"	33
027c360b43	1000	1000	local	Registered	✓	"S650H PRO"	74


Select all **Mobile devices** and click on **Export**. Save the file to your PC.

## Installation

1. Install the Virtual integrator.
2. Change the role of the DECT Manager + Integrator + Base (Optional) to DECT Manager + Base (Optional)
3. Integrator: Add the DECT managers to the Integrator config, see item 1.
4. DECT manager: Configure the Integrator, see item 1.
5. Import the DECT base station export into the Integrator. **SETTINGS - Base stations - Administration - Import**

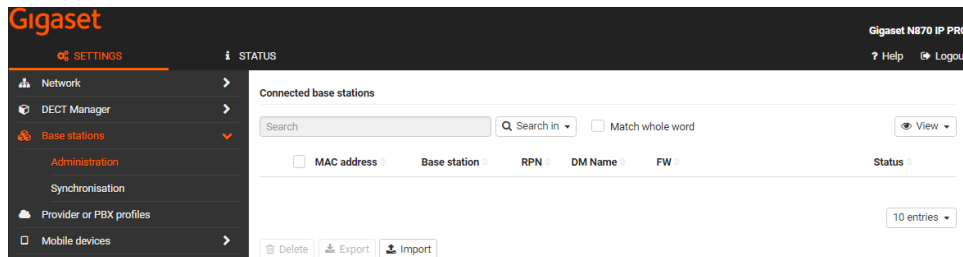

6. Import the Mobile devices export into the Integrator. **SETTINGS - Mobile devices - Administration - Import**

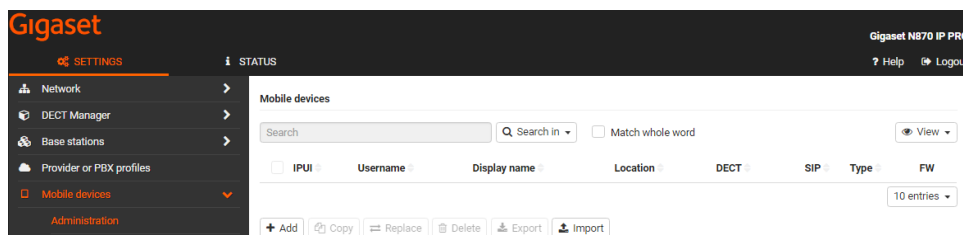

7. Set-up the Base station synchronisation Hierarchy.
8. If necessary, set up cross-cluster synchronisation via DECT manager synchronisation.