

# DExxx - Function keys can be blocked for auto provisioning

## Introduction

In some cases, it is requested that function keys can not be overwritten by auto provisioning.

Example:

- Static key for log in/out in groups.
- Programming a second SIP account under a key.
- Keys that are programmed manually and not available in the auto provisioning.
- ...


For this, a new feature is implemented that keys can be blocked for auto provisioning via the web-interface of the device

Feature is available for:

- DE900/700 SW 02.00.11 or higher
- DE410/310 SW 02.00.08 or higher

## Configuration

Open the web-interface of the device and go to: Settings - Function keys

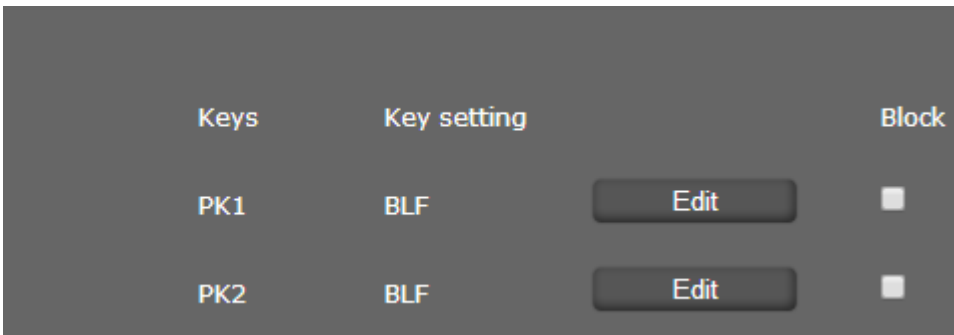

Keys	Key setting		Block
PK1	BLF	Edit	<input type="checkbox"/>
PK2	BLF	Edit	<input type="checkbox"/>

Here you will see the new column  
**"Block"**

When **enabled** the keys can **not** be overwritten by Auto provisioning.

When **disabled**, the keys can be changed by Auto provisioning.

- [Introduction](#)
- [Configuration](#)