

FAQ Nx70 - Convert N720 database to N870

Introduction

In case you want to migrate an N720 system to an N870, then Gigaset can convert the N720 settings to an xml file you can upload in the N870. This will save you a lot of time copying the SIP account data.

The following settings will be converted:

For all 100 Handsets:

1. IPUI
2. SIP Authentication name
3. SIP Password
4. SIP username
5. Display name
6. Voicemail active yes/no
7. Voicemail number
8. Call manager settings
9. Calls Count settings
10. MWI missed calls
11. MWI alarm
12. MWI Mailbox

Other settings needs to be added manually.


Valid for:

N670

N870

What is needed

1. In the N720 you need to save the settings of the system.
2. Send this encrypted file to your Gigaset contact.
3. Gigaset will convert this file to an **N870.xml** file.
4. Open the web-interface of the N870 and go to: **SETTINGS - Mobile devices - Administration - Import**

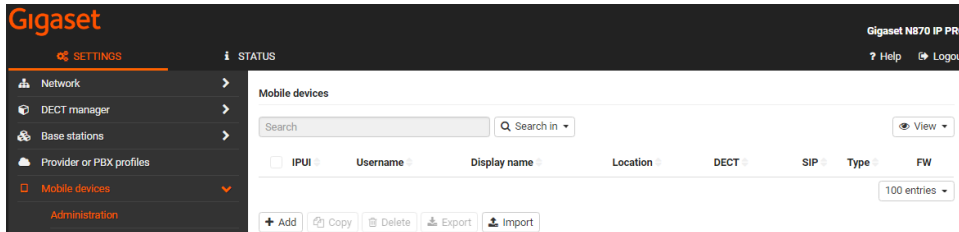

11. Select the "**N870.xml**" file and all DECT handset settings are loaded.
12. Register the DECT handsets to the N870, using the standard PIN code "**0000**"