

FAQ Nx70 - Broadsoft Phone books.

Introduction

Broadsoft supports the following phone books:

1. Personal
2. Group
3. Group Common
4. Enterprise
5. Enterprise Common

Valid for:

N670

N870

These phonebooks can be used on the DECT professional handsets.



Call transfer using XSI phonebooks

The feature of using the XSI phonebook during Call Transfer (Lookup contact) is under development.

Web-interface

In the web-interface go to: **SETTINGS - Telephony - XSI Services**

Parameter	Description	Auto provisioning
Server address	The URL of the XSI server	XSIDir.1.ServerURL
Enable XSI directories	Enable or disable the usage of XSI phonebooks	DmGlobal.0.XSINetdirs (0=Disable / 1=Enable)
Enable call logs	Enable or disable the usage of XSI call logs	DmGlobal.0.XSICallLogs (0=Disable / 1=Enable)

In the web-interface go to: **SETTINGS - Online directories - XSI**

- Network >
- DECT Manager >
- Base stations >
- Provider or PBX profiles >
- Mobile devices >
- Telephony >
- Online directories** v
 - Corporate
 - XML
 - XSI**
 - Central phonebook
- Online services >
- System >
- Auto-hide menu

XSI directory

Server address ?

Enable XSI directories ?

Enable list mode

XSI Personal directory

Enable Personal directory ?

Directory name ?

Personal

XSI Group directory

Enable Corporate Yellow Pages ?

Directory name ?

Group

XSI Group Common directory

Enable Corporate Private Pages ?

Directory name ?

Group Common

XSI Enterprise directory

Enable Corporate Private Pages ?

Directory name ?

Enterprise

XSI Enterprise Common directory

Enable Corporate Private Pages ?

Directory name ?

Enterprise Common

Parameter	Description	Auto provisioning
Server address	The URL of the XSI server	XSIDir.1.ServerURL (Setting is done in XSI services)
Not in the web-interface	This is pasted behind the XSI server URL: Can be changed if needed. Value = com.broadsoft.xsi-actions/v2.0	XSIDir.1.Api
Enable list mode	0 = disabled 1 = enabled	XSIDir.1.StartWithList
Enable XSI directories	Enable or disable the usage of XSI phonebooks	
Enable Personal directory		XSIDir.1.PDirName
Directory name		
Enable Group directory		XSIDir.1.GDirName
Directory name		
Enable Group Common directory		XSIDir.1.GCDirName
Directory name		
Enable Enterprise directory		XSIDir.1.EDirName
Directory name		
Enable Enterprise Common directory		XSIDir.1.ECDirName
Directory name		

In the web-interface go to: **SETTINGS - Mobile devices - Administration** and select the handset

Broadsoft XSI services

Use SIP credentials


Yes No

Parameter	Description	Auto provisioning
Use SIP credentials	For Authentication use the SIP credentials or the Broadsoft XSI username and Password	hs.<IPUI>.XsiSip (0=Use XSI credentials / 1 = Use SIP credentials)
		hs.<IPUI>.XsiUsername
		hs.<IPUI>.XsiPassword

DECT handset



On the handset press the Phone book key to open the list with available Phone books. Which phonebooks are visible depends on the setting made by the Administrator.

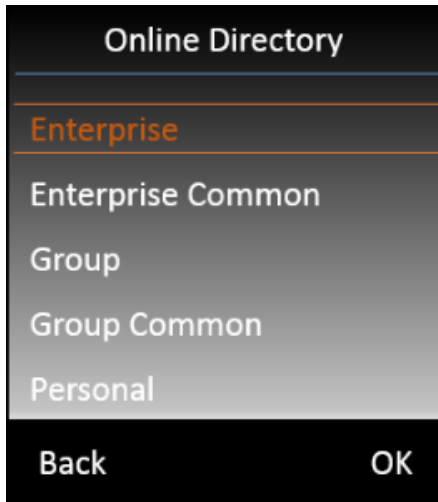

Lookup caching policy

You can change the Lookup caching policy, see this wiki page: [FAQ Nx70 - Lookup caching](#)